


TDC Power Products Co.,Ltd

DA-20-24

INPUT VOLTAGE **120VAC**
 OUTPUT VOLTAGE **24VAC**

ELECTRICAL & MECHANICAL SPECIFICATION

UL
LISTED
 E149474
 3G58

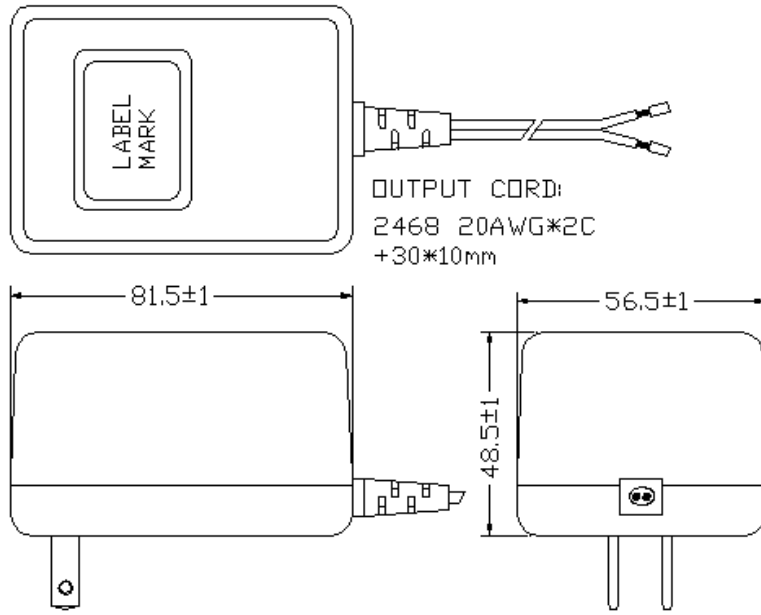

Output Socket:

2468 20AWG*2C 1.8M
LENGTH+30*10mm

ELECTRONICAL SPECIFICATION

Input Voltage	120	Volts
Frequency (Hz)	60	Hz
Power Rated (W)	28	W
Exciting Current With No load	100	mA Max
Exciting Current With Full load	260	mA Max
Output Voltage	24.0	Volts±5%
Output Current	0.83	Amp
Output Voltage Without Load	26.9	Volts±5%
HI-POT :		
Test Time	1	Min
PRI TO SEC	1250	Volts
PRI TO CORE	1250	Volts
SEC TO CORE	1250	Volts
Efficiency	80	%
Insulation Class	B (130)	°C

BOX:10.5*6*9cm
 CARTON:BOX:10.5*6*9cm

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	81.5*56.5*48.5	mm
Weight	470	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40°C±2°C	
RELATIVE HUMIDITY	90% RH	

ELECTRICAL CIRCUIT

