

TDC Power Products Co.,Ltd

DB-300-36W


INPUT VOLTAGE:240VAC
OUTPUT VOLTAGE:36VAC

ELECTRICAL & MECHANICAL SPECIFICATION

MODEL NO.:DB-300-36W
PRI .:240VAC 50Hz
SEC .:36VAC Max 300VA

TDC POWER PRODUCTS CO., LTD. 01
Room C13 5F NO.210, Sec.3 Ta-Tung Rd., Shi-chih Dist.,
New Taipei City, Taiwan
MADE IN CHINA

ELECTRONICAL SPECIFICATION		
Input Voltage	240	Volts
Frequency (Hz)	50	Hz
Power Rated (W)	315	W
Exciting Current With No load	350	mA Max
Exciting Current With Full load	1600	mA Max
Output Voltage	36	Volts±5%
Output Current	5.56	Amp
Output Voltage Without Load	41.0	Volts±5%

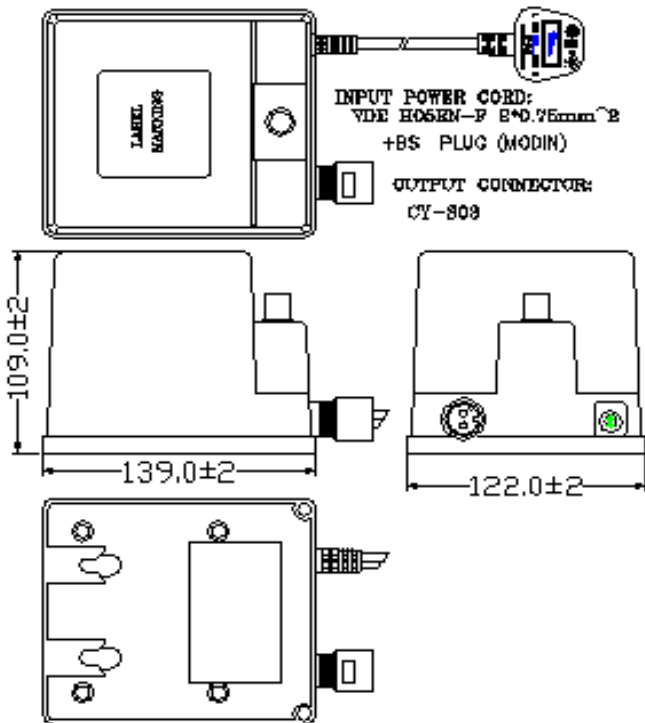

HI-POT :		
Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	70	%
Insulation Class	B (130)	°C

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	139.0*122.0*109.0	mm
Weight	5100	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40°C±2°C	
RELATIVE HUMIDITY	90% RH	

Input Cable: **VDE H05RN-F 2*0.75mm²
2.0M LENGTH+ BS PLUG(MODIN)**

Output Cable: **CY-S03**

ELECTRICAL CIRCUIT

