

TDC Power Products Co.,Ltd

DE-10-24

INPUT VOLTAGE **230VAC**
 OUTPUT VOLTAGE **24VAC**

ELECTRICAL & MECHANICAL SPECIFICATION

MODEL NO.: DE-10-24
 PRI.: 230-240VAC 50Hz 15VA
 SEC.: 24VAC Max 10VA

IP20


TDC POWER PRODUCTS CO., LTD.01

ELECTRONICAL SPECIFICATION

Input Voltage	230	Volts
Frequency (Hz)	50	Hz
Power Rated (W)	15	W
Exciting Current With No load	80	mA Max
Exciting Current With Full load	100	mA Max
Output Voltage	24.0	Volts±5%
Output Current	0.417	Amp
Output Voltage Without Load	28.0	Volts Max

HI-POT :

Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	80	%
Insulation Class	B (130)	°C

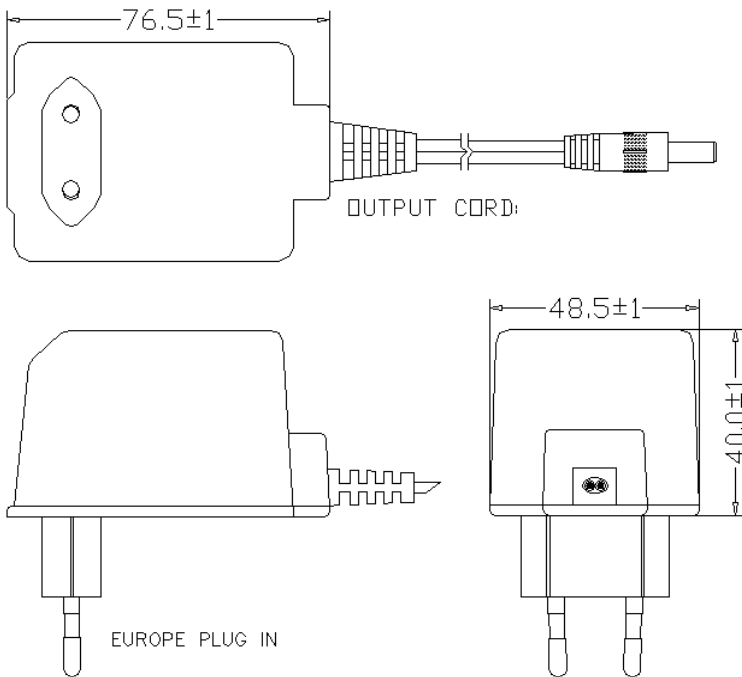

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	76.5*48.5*40.0	mm
Weight		g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40°C±2°C	
RELATIVE HUMIDITY	90% RH	

Input Cable: **EUROPE PLUG IN**

Output Cable: **2468 20AWG*2C 1.8M LENGTH+5.5*2.1*10mm(I)PLUG**

ELECTRICAL CIRCUIT

