

TDC Power Products Co.,Ltd

## DE-10-24L


INPUT VOLTAGE **230VAC**  
 OUTPUT VOLTAGE **24VAC**

### ELECTRICAL & MECHANICAL SPECIFICATION

MODEL NO.: DE-10-24L  
 PRI.: 230-240VAC 50Hz 15VA  
 SEC.: 24VAC Max 10VA

TDC POWER PRODUCTS CO., LTD.01  
 MADE IN CHINA

ELECTRONICAL SPECIFICATION		
Input Voltage	<b>230</b>	Volts
Frequency (Hz)	<b>50</b>	Hz
Power Rated (W)	<b>15</b>	W
Exciting Current With No load	<b>70</b>	mA Max
Exciting Current With Full load	<b>90</b>	mA Max
Output Voltage	<b>24.0</b>	Volts±5%
Output Current	<b>0.417</b>	Amp
Output Voltage Without Load	<b>28.4</b>	Volts±5%
HI-POT :		
Test Time	<b>1</b>	Min
PRI TO SEC	<b>3750</b>	Volts
PRI TO CORE	<b>3750</b>	Volts
SEC TO CORE	<b>1250</b>	Volts
Efficiency	<b>80</b>	%
Insulation Class	<b>B (130)</b>	°C

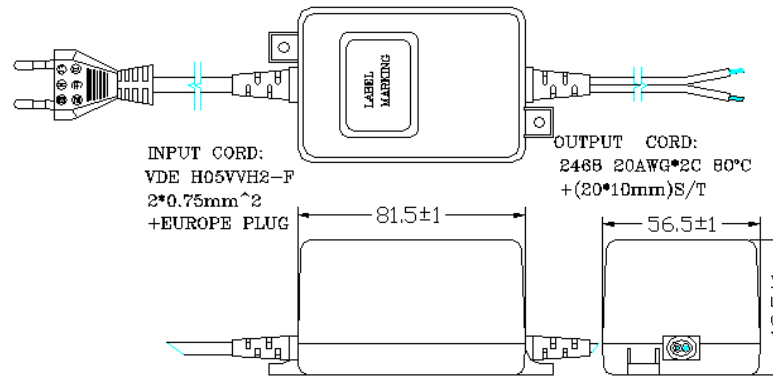

MECHANICAL SPECIFICATION		
Dimensions (L*W*H)	<b>81.5*56.5*48.5</b>	mm
Weight	<b>520</b>	g
Environment:		
Operating Temperature	<b>-10 To 40</b>	°C
Storage Temperature	<b>-20 To 70</b>	°C
Relative Temperature 40°C±2°C		
RELATIVE HUMIDITY	<b>90% RH</b>	

Input Cable: **VDE H05VVH2-F 2\*0.75mm<sup>2</sup> 2.0M LENGTH+EUROPE PLUG**

Output Cable: **2468 20AWG\*2C 1.8M LENGTH+20\*10mm S/T**

