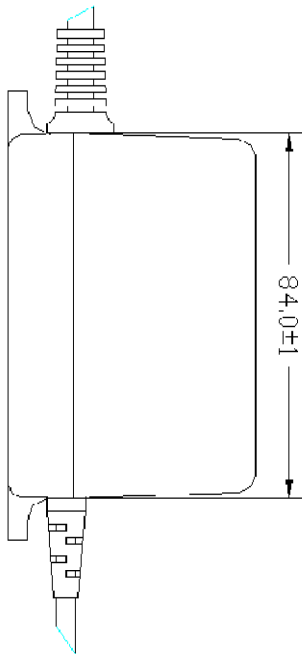

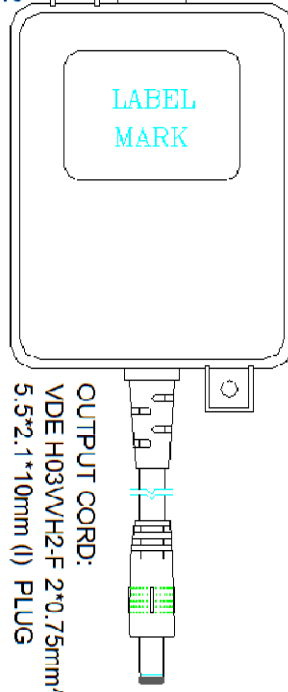


TDC Power Products Co.,Ltd

DS-36-24

 INPUT VOLTAGE **240VAC**

 OUTPUT VOLTAGE **24VAC**
ELECTRICAL & MECHANICAL SPECIFICATION
N15790

 INPUT CORD:
 VDE H05VVH2-F 2*0.75mm²
 SAA PLUG(2PIN)

 OUTPUT CORD:
 VDE H03VVH2-F 2*0.75mm²
 5.5*2.1*10mm (I) PLUG

ELECTRONICAL SPECIFICATION

Input Voltage	240	Volts
Frequency (Hz)	50	Hz
Power Rated (W)	45	W
Exciting Current With No load	120	mA Max
Exciting Current With Full load	240	mA Max
Output Voltage	24	Volts ±5%
Output Current	1.5	Amp
Output Voltage Without Load	27.5	Volts±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	70	%
Insulation Class	B (130)	°C

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	84.0*64.5*55.5	mm
Weight	920	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature 40°C±2°C		


RELATIVE HUMIDITY 90% RH

Input Cable: **VDE H05VVH2-F 2*0.75mm² 2.0M LENGTH+SAA PLUG**

Output Cable: **VDE H03VVH2-F 2*0.75mm² 1.8M LENGTH+5.5*2.1*10MM (I)PLUG**

ELECTRICAL CIRCUIT

 T¹FUSE: 250V/2A 130°C

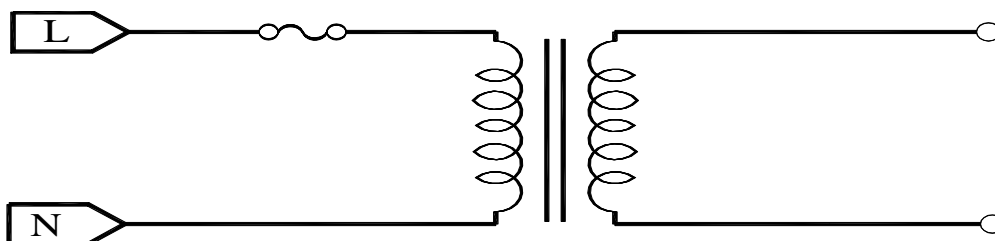**INPUT:
240Vac 50Hz**

**OUTPUT:
24Vac 36VA**
Transformer