

TDC Power Products Co.,Ltd

DE-36-24T

INPUT VOLTAGE **230VAC**


OUTPUT VOLTAGE **24VAC**

ELECTRICAL & MECHANICAL SPECIFICATION

MODEL NO.: DE-36-24T
 PRI.: 230V~ 50Hz 45VA
 SEC.: 24V~ Max 36VA

TDC POWER PRODUCTS CO., LTD. 01
 MADE IN CHINA

ELECTRONICAL SPECIFICATION		
Input Voltage	230	Volts
Frequency (Hz)	50	Hz
Power Rated (W)	45	W
Exciting Current With No load	100	mA Max
Exciting Current With Full load	220	mA Max
Output Voltage	24.0	Volts±5%
Output Current	1.5	Amp±5%
HI-POT :		
Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	70	%
Insulation Class	B (130)	°C

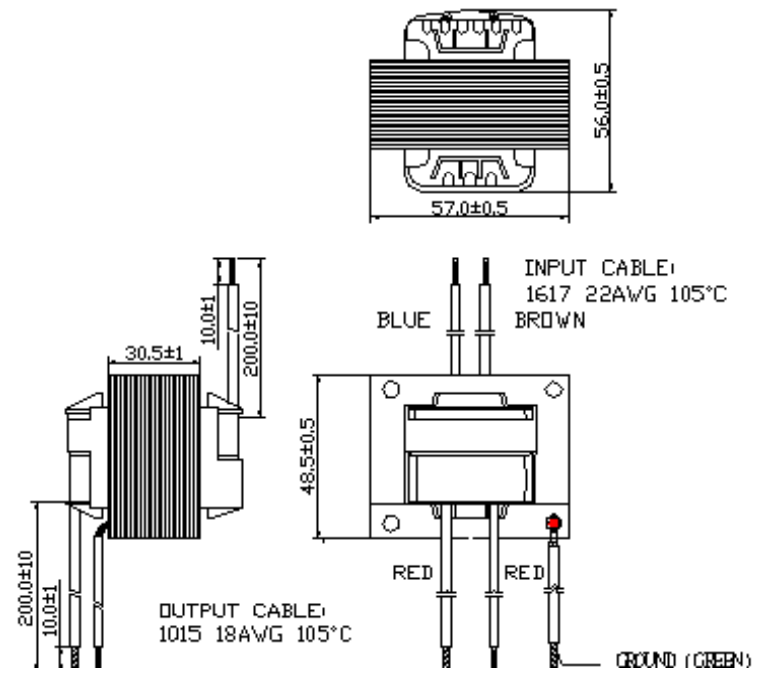

MECHANICAL SPECIFICATION		
Dimensions (L*W*H)	57.0*56.0*48.5	mm
Weight	645	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature 40°C±2°C		
RELATIVE HUMIDITY	90% RH	

Input Cable:	1617 22AWG 105 °C 200mm LENGTH+S/T(10*10mm)
Output Cable:	1015 18AWG 105 °C 200mm LENGTH+S/T(10*10mm)

ELECTRICAL CIRCUIT

