

TDC Power Products Co.,Ltd


DS-60-12W

INPUT VOLTAGE **240VAC**

OUTPUT VOLTAGE **12VAC**


ELECTRICAL & MECHANICAL SPECIFICATIONS

NSW15653

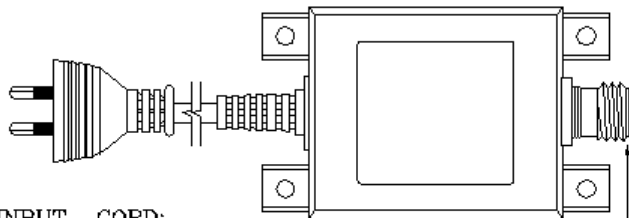

INPUT CORD:
VDE H05RN-F 2*0.75mm²
+SAA PLUG (2PIN)

OUTPUT:
2.35φ FEMALE CONNECTOR

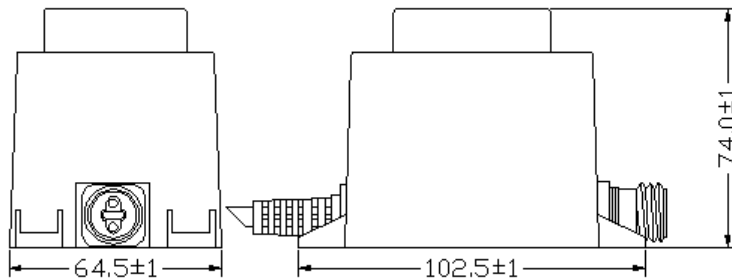

Input Cable: **VDE H05RN-F 2*0.75mm² 2.1M LENGTH+SAA PLUG**

Output Cable: **2.35 φ FEMALE CONNECTOR**

ELECTRONICAL SPECIFICATIONS

Input Voltage	240	Volts
Frequency (Hz)	50	Hz
Power Rated (W)	70	W
Exciting Current With No load	140	mA Max
Exciting Current With Full load	330	mA Max
Output Voltage	12.0	Volts±5%
Output Current	5.0	Amp
Output Voltage Without Load	13.0	Volts±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	80	%
Insulation Class	B (130)	°C


MECHANICAL SPECIFICATIONS

Dimensions (L*W*H)	102.5*64.5*74.0	mm
Weight	1430	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Humperature	40°C±2°C	
RELATIVE HUMIDITY	90% RH	

ELECTRICAL CIRCUIT

T'FUSE: 250V/2 130°C

INPUT:
240Vac 50Hz

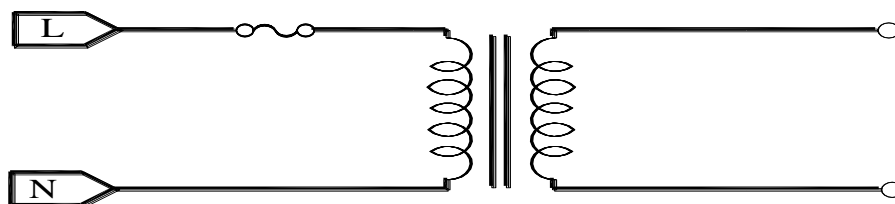

OUTPUT:
12Vac 60VA

Transformer