


TDC Power Products Co.,Ltd

BCA-57-12

INPUT VOLTAGE: **120VAC**
OUTPUT VOLTAGE **12VDC**

ELECTRICAL & MECHANICAL SPECIFICATION

UL
LISTED
E149474
3G58

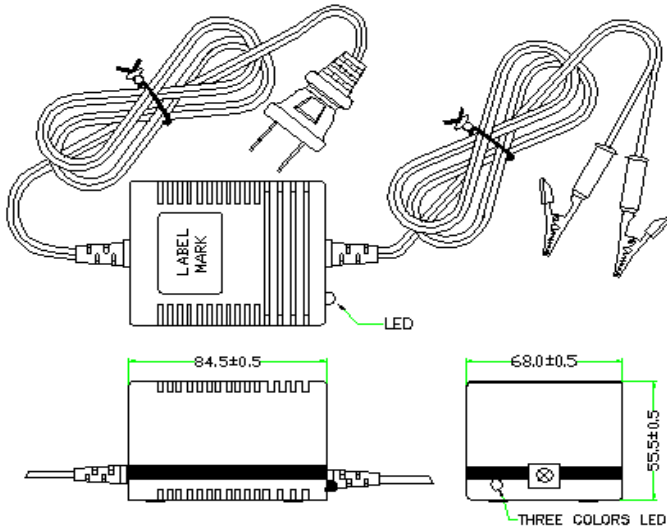

ELECTRONICAL SPECIFICATION

Input Voltage	120	Volts
Frequency (Hz)	60	Hz
Power Rated (W)	32	W
Exciting Current With No load	70	mA Max
Exciting Current With Full load	160	mA Max
Output Voltage	12.0	VoltDC±5%
Output Current (O/P 12.0VDC)	0.6	Amp
Output Voltage Without Load	14.8	VoltDC±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	1250	Volts
PRI TO CORE	1250	Volts
SEC TO CORE	1250	Volts
Insulation Class	B (130)	°C

BOX:13*7*10cm
CARTON:41*30*22cm

LED INDICATE

LED (RED)	CHARGERING
LED (GREEN)	FULL

Protected Against Short-Circuit	@
Protected Against Polarity Inversion	@

BATTERY / AH	TIMES / HOURS
10	9
17	16

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	84.5*68.0*55.5	mm
Weight	665	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40°C±2°C	
RELATIVE HUMIDITY	90% RH	

Input Cable:	SPT-2 18AWG/2C 105 °C 2.0M LENGTH+AMERICA PLUG
Output Cable:	SPT-1 18AWG/2C 105 °C 1.8M LENGTH CLIP/ RED(+) BLACK(-)

ELECTRICAL CIRCUIT

