


TDC Power Products Co.,Ltd

DE-36-24W(A)

INPUT VOLTAGE **230VAC**

OUTPUT VOLTAGE **24VAC**

ELECTRICAL & MECHANICAL SPECIFICATION

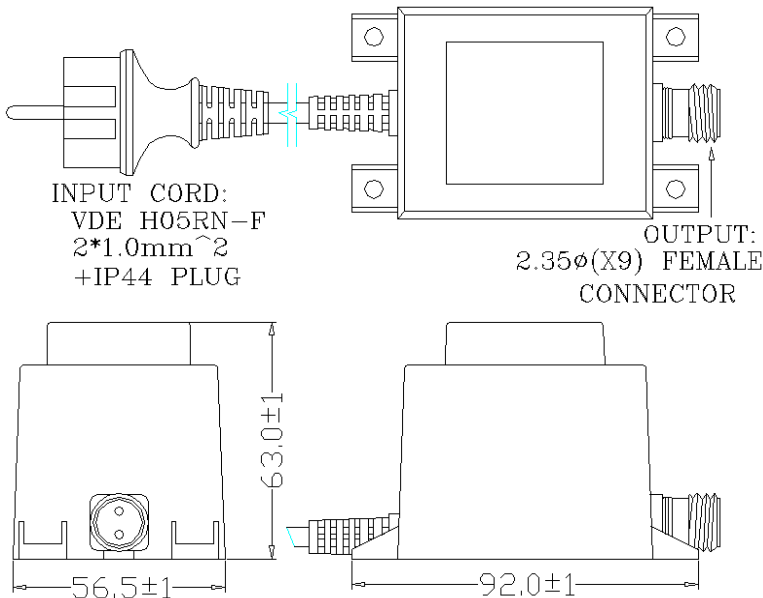

INPUT CORD:
VDE H05RN-F
2*1.0mm²
+IP44 PLUG

OUTPUT:
2.35φ(X9) FEMALE
CONNECTOR

ELECTRONICAL SPECIFICATION

Input Voltage	230	Volts
Frequency (Hz)	50	Hz
Power Rated (W)	45	W
Exciting Current With No load	130	mA Max
Exciting Current With Full load	240	mA Max
Output Voltage	24.0	Volts±5%
Output Current	1.5	Amp
Output Voltage Without Load	27.2	Volts±5%

HI-POT :

Test Time	1	Min
PRI TO SEC	3750	Volts
PRI TO CORE	3750	Volts
SEC TO CORE	1250	Volts
Efficiency	80	%
Insulation Class	B (130)	°C

"Eine beschädigte
Anschlußleitung kann
nicht ausgewechselt
werden. Der Trafo
darf nicht weiter
benutzt werden."

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	92.0*56.5*63.0	mm
Weight	845	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature	40°C±2°C	
RELATIVE HUMIDITY	90% RH	

Input Cable: **VDE H05RN-F 2*0.75mm²
2.0M LENGTH Germany PLUG**

Output Cable: **2.35φ FEMALE CONNECTOR**

ELECTRICAL CIRCUIT

